




SPECIFICATION

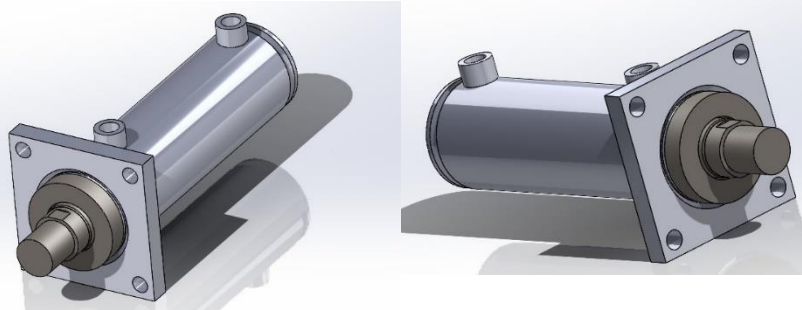


MAX OPERATING PRESSURE : 160 BAR

TEMPERATURE : -30 DEG TO 100 DEG C

STROKE : UPTO 3000 STROKE

RECOMOMENDED STROKES AS PER
ISO :9001 – 2015 25, 50, 80, 100, 120,
250, 320, 400, 500 MM

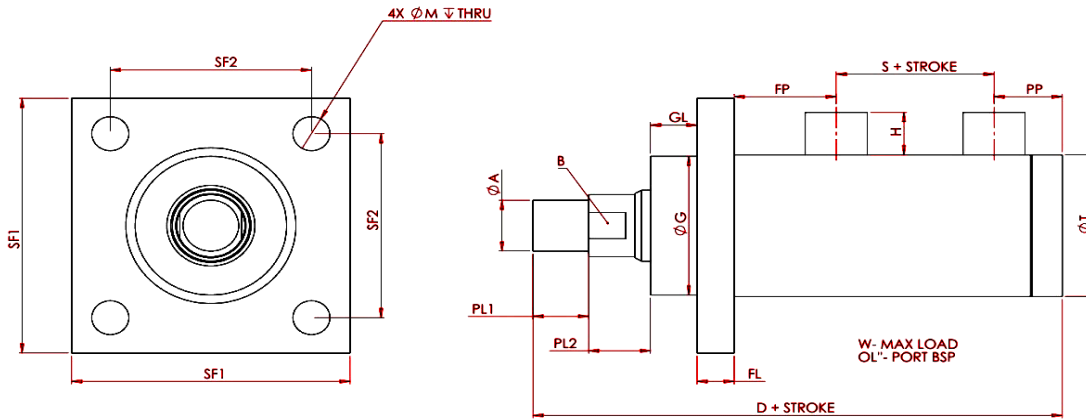

BORE DIA	ROD DIA	ØA	SF1	SF2	ØM	ØT	ØG	PL1	PL2	GL	FL	FP	S	PP	D	OL	B (A/F)	H	W (TON)
40	20	M16	110	85	11	50	49	20	20	15	12	33	51	22	173	1/4	16	15	1.5
	25	M16															20		
50	25	M16	120	95	11	60	59	20	20	15	15	33	53	28	183	3/8	20	20	2.5
	30	M20															24		
63	32	M20	130	105	14	73 75	74	25	25	15	18	29	51	30	193	3/8	27	20	4.5
	40	M24															30		
70	40	M30	140	110	14	85	84	30	25	15	20	35	67	35	227	1/2	35	20	5
	45	M30															40		
80	50	M40	150	120	17	92 95	94	40	25	20	20	40	70	35	250	1/2	45	20	7
	56	M40															50		
100	56	M40	185	150	17	115 120	114	50	25	20	22	36	67	35	255	3/4	50	20	11
	70	M50															60		
125	70	M50	200	160	17	140 145	145	50	25	20	22	36	77	35	265	3/4	60	20	19
	80	M60															70		
150	100	M80	230	190	22	170 180	180	60	25	20	25	40	80	35	285	3/4	90	20	26
	110	M90															100		

